High Quality With Global Standards, CE EMC-B,RoHs,FCC,UL Certificated.

## Specification

	Indoor					Outdoor				
Pixel Pitch	2.5mm	3.07mm	4mm	5mm	10mm	4mm	5mm	6.67mm	8mm	10mm
Density (dots/m²)	160000	105688	62500	40000	10000	62500	40000	22478	15625	10000
Module Size	320x160mm					320x160mm				
Module Resolution (dots	128x64	104x52	80x40	64x32	32x16	80x40	64x32	48x24	40x20	32x16
Cabinet Size	960x960x87mm					960x960x87mm				
Cabinet Weight	24kg/pc					26kg/pc				
Material	Die-casting Magnesium Alloy					Die-casting Magnesium Alloy				
Brightness	800-1000cd/m²					5500-6500cd/m²				
AVG Power Con	450w	380w	350w	320w	280w	480w	450w	350w	320w	280w
MAX Power Con	980w	900w	880w	850w	750w	980w	950w	880w	850w	750w
Best Viewing Distance	2.5to 25m	3to 30m	4to 40m	5to 50m	10to100m	4to 40m	5to 50m	6to 60m	8to 80m	10to100m
Grey Level	14bits					14bits				
Fresh frequency	≥960HZ					≥960HZ				
Humidity-operating	10-95% RH					10-95% RH				
Operating Life	100000 hours					100000 hours				
Certificates	CE,RoHs,FCC,UL					CE,RoHs,FCC,UL				
Warranty	3 Years					3 Years				
Protective grade	IP43					IP65 Waterproof				



# SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789





# LINSN-MA-960x960

MA-960X960-Indoor/Outdoor

# Indoor & Outdoor LED display

Linsn-MA-960 Series Standard Size 960X960mm LED display is Linsn latest LED display with Ip65 good waterproof level. we use best Driving IC such as 2038S, MBI5124, Nationstar LED to ensure our LED display best brightness.can be used as indoor fixed led display, outdoor fixed led display and rental LED display.

SHENZHEN LINSN LED CO.,LTD.



# Focus on details


### ACCURATE CABINET ALIGNMENT, HIGH PRECISE ASSEMBLY

Equipped with Unit's unique lock, the position of each cabinet can be precisely adjusted from Six directions, left or right, up or down, front or back, so every cabinet can be positioned to the exact place with accuracy to millimeter, presenting a ultraflat and seamless cabinet alignment.

#### 320MMX160MM STANDARD SIZE MODULE

Standard size panel: 320\*160mm. Pay more attention to the standard led screen display performance, the Quick Assembling and Maintenance. also it is very convenient when you change the pixel pitch such as P5mm to P10mm. you dont need to change anything, just change the module as they have the same module size and structure.



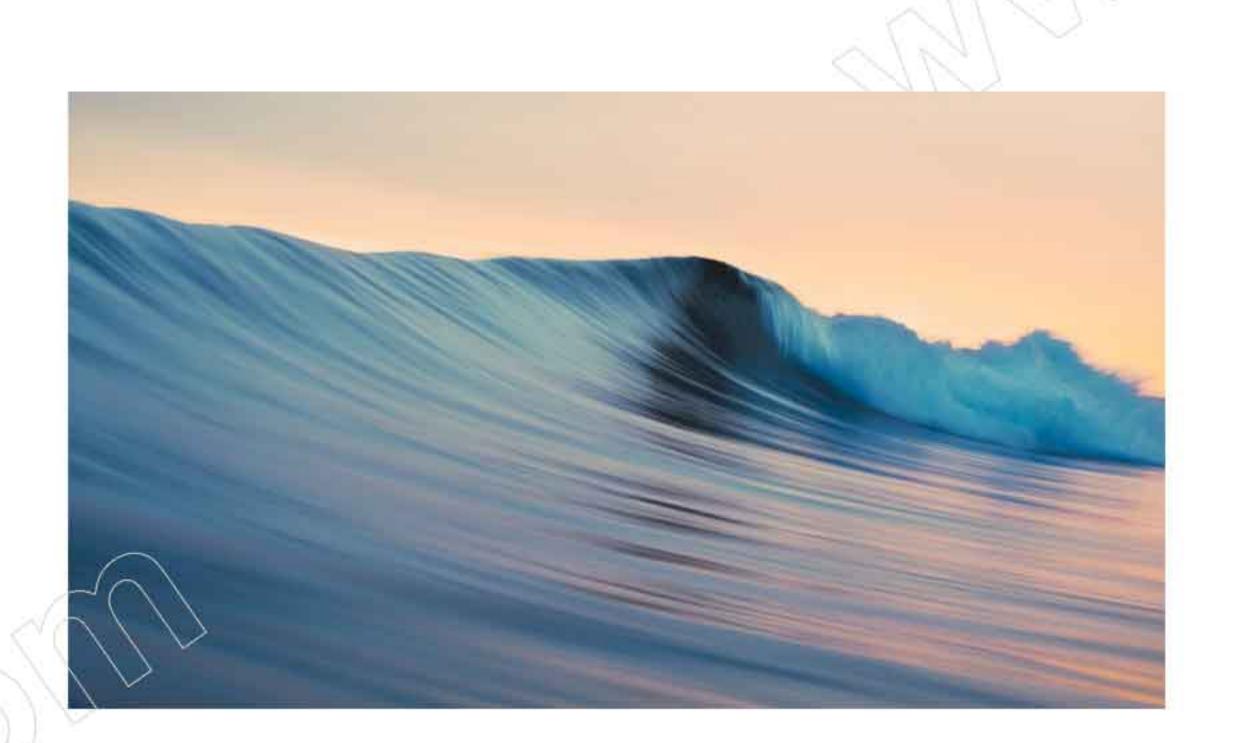




### WIDE VIEWING ANGLE

Viewing angle is up to 160° vertical and horizontal, providing a wide viewing angle.



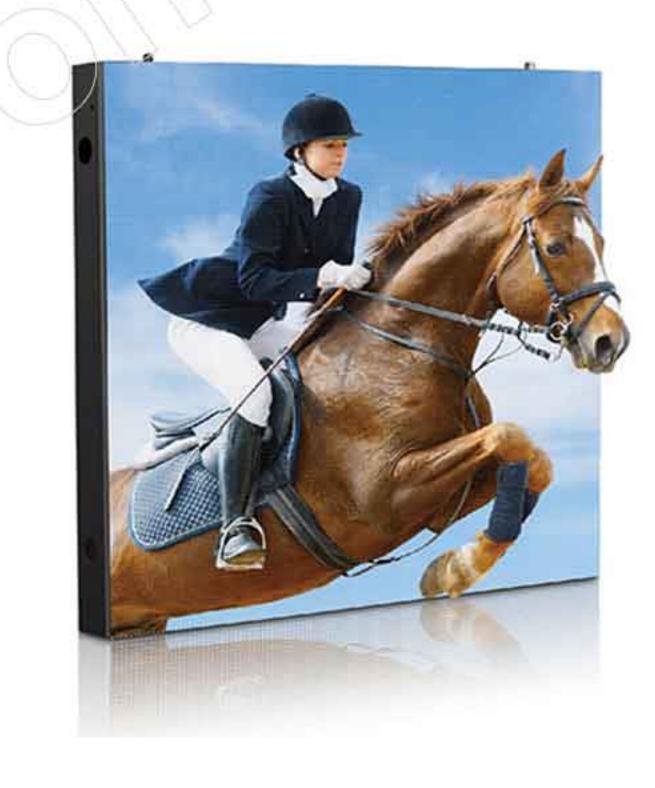

#### HIGH RELIABILITY

The ingress protection of cabinet rating up to 68, the fully sealed cabinet is weatherproof, dustproof, damp-proof, bringing the ingress protection of led display up to a new level.





Door Key







### DELICATE CABINET DESIGN

Linsn-Max- 960mm Series LED display Product is Less weight led display with quick locks, delicate structure for easy installation without Gaps. Humanization handlebar design make you more easy to move the cabinet.

### **ULTRA THIN**

LED display with ultra thin cabinet design, the thickness is only 87mm.Die-cast aluminum cabinet design light and easy to transport, good flatness and seamless.



### ULTRA LIGHT WEIGHT CABINET

Weight Only 26kg, easy for transport, save your labor cost, also light weight is convenient for installtion, assembly and disassembly.





